

**OASISOLB150 Cartridge**

The media in this unique absorbent cartridge efficiently and economically removes free, emulsified and dissolved oils in many production fluids.


Oilbond exhibits very low clean pressure loss which gradually increases as the element becomes loaded providing a positive indication of cartridge change out time.

**Benefits**

- Manufactured at UK production facilities
- Thermally bonded ends caps
- Reduces hydrocarbon levels to meet regulatory discharge standards
- Absorbed hydrocarbons are chemically bound by the media and not leachable
- High integrity construction

**Typical Applications**

- Industrial Discharge Water
- Commercial Bilge Water
- Surface Water Run Off
- Tempered Water Systems
- Cooling Medium Systems
- Produced Water Systems
- Open Drains Systems

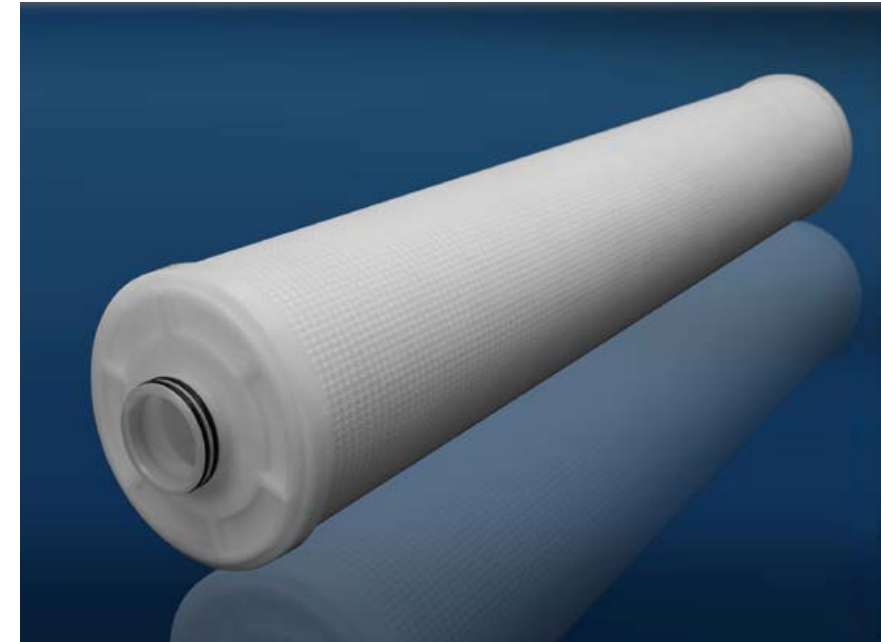

<b>Filter Media:</b>	Wound Polymer blend
<b>Cartridge Length:</b>	40 inches 1524mm (others on request)
<b>Cartridge Diameter:</b>	6.5 inches 165mm
<b>End Fitting:</b>	Made to suit vessel configuration
<b>Seal Materials:</b>	E (EPDM) N (Nitrile) B (BUNA) V (Viton)
<b>Max Temperature:</b>	70C @20psid
<b>Max Flow Rate:</b>	3.4 m <sup>3</sup> /hr per cartridge (nominal)